




Value marked in red (Amount of refrigerant) must be reviewed before each production (according used compressor in the batch). Possible options:
Compressor vendor / type / amount of refrigerant / amount of oil

GANGZHOUWANBAO/ ETZ95L / 50g / 160ml

SN barcode label (dimensions could be different)
Position: on the back of the appliance. Sticker must be easy to read by hand scanner, cannot be covered by any appliance elements:

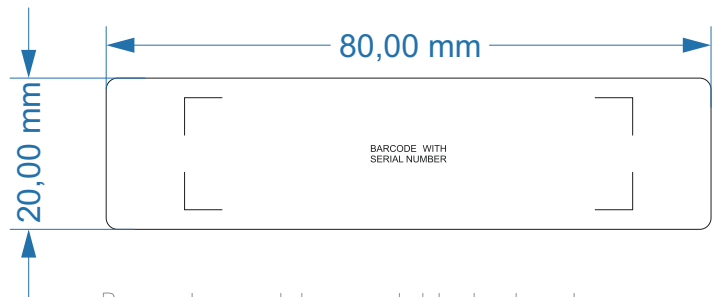

Barcode must be readable by hand scanner
SN Barcode - ITF or CODE128 Standard
Glossy paper - 100% white or silver color
Printing according to the EN 60335:

7.14 The markings required by the standard shall be clearly legible and durable.

Compliance is checked by inspection and by rubbing the marking by hand for 15 s with a piece of cloth soaked with water and again for 15 s with a piece of cloth soaked with petroleum spirit. The petroleum spirit to be used for the test is aliphatic solvent hexane. After all the tests of this standard, the marking shall be clearly legible. It shall not be easily possible to remove marking plates nor shall they show curling.

NOTE In considering the durability of the marking, the effect of normal use is taken into account. For example, marking by means of paint or enamel, other than vitreous enamel, on containers that are likely to be cleaned frequently, is not considered to be durable.

Designed by	T. Kowalski		2017-07-20	Material Separated sticker (glossy paper) with permanent glue	Amica	Archive no
Drawn by	T. Kowalski		2017-07-20			
Checked by	R. Bedonski		2017-07-20			
Approved by	R. Bedonski		2017-07-20			
	Name	Signature	Date			
Scale	Name			Drawing no.		Format
1:1	Rating label / Barcode with SN			RL-FZ2916.3DFX_1171080_Amica		A4